



APM Buildings Quotation Package




QUOTATION FOR:
3 Sided 3Side243612

CONTACT:
1-888-261-2488

CONSTRUCTION: Post Frame
DIMENSIONS: 24' X 36' X 12'

SPECIFICATIONS FOR 24' X 36' X 12' POST FRAME PACKAGE:

- **MATERIAL PACKAGE**
 - Pre-Engineered Wood Trusses (4/12 Pitch, 4' O/C)
 - 4.125 x 5.25 GLU LAM TREATED 3 Ply Eave Posts (12' O/C)
 - 4.125 x 5.25 GLU LAM TREATED 3 Ply Gable Posts (8' O/C)
 - 2 x 8 Treated Skirt Boards (1 Row)
 - 2 x 4 Wall Girts (24" O/C) and Roof Purlins (24" O/C)
 - 2 x 12 Double Top Girt Truss Carrier
 - Beige Tuff Rib 3 Panel Steel Siding
 - Forest Green Tuff Rib 3 Panel Steel Roof
 - No Concrete Provided
- **DOORS & WINDOWS**
 - Open Wall On Eave1
- **12" EAVE OVRHG., 0" GABLE OVRHG. W/ VENTED STEEL SOFFIT**
- **FASTENERS**
 - 1 In.Metal to Wood Screws for Steel Wall, Roof Panels
 - 4.5 Headlok Screws for Truss Carrier
 - 16D Galv. Nails for Skirt Board
 - Galvanized Steel Framing Nails
- **DETAILED BUILDING PLANS**

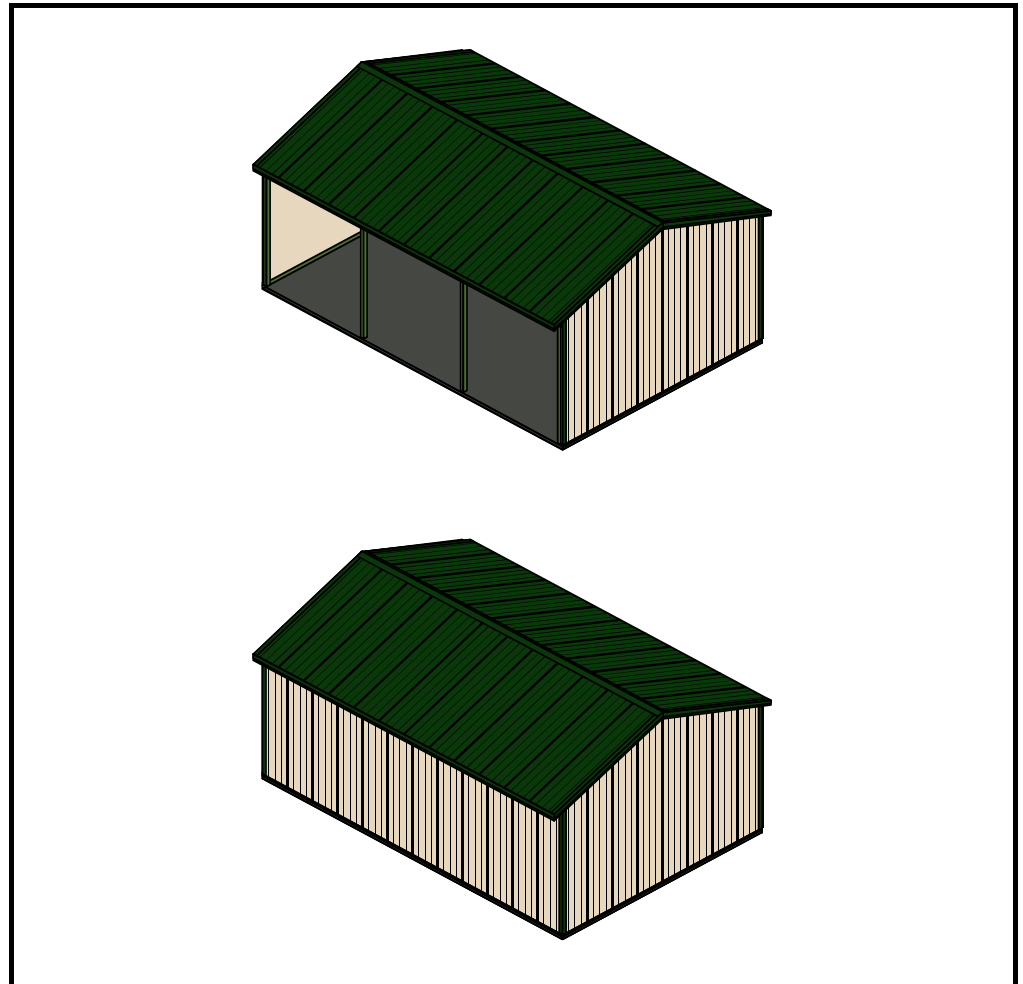

Subtotal	\$6,710.40
Discount	(\$805.00)
Total	\$5,905.40

QUOTATION DATE: 3/4/2019

ESTIMATE NUMBER: 19872

Prices are good for 10 days, until 3/14/2019



POLE LAYOUT

Personal Use, 864 sq. ft.



Eave 1

