



# APM Buildings Quotation Package



**QUOTATION FOR:**  
3 Sided 3Side306412

**CONTACT:**  
1-888-261-2488

**CONSTRUCTION:** Post Frame  
**DIMENSIONS:** 30' X 64' X 12'

**SPECIFICATIONS FOR 30' X 64' X 12' POST FRAME PACKAGE:**

• **MATERIAL PACKAGE**

- Pre-Engineered Wood Trusses (4/12 Pitch, 4' O/C)
- 4.125 x 5.25 GLU LAM TREATED 3 Ply Eave Posts (16' O/C)
- 4.125 x 5.25 GLU LAM TREATED 3 Ply Gable Posts (8' O/C)
- 2 x 8 Treated Skirt Boards (1 Row)
- 2 x 4 Wall Girts (24" O/C) and Roof Purlins (24" O/C)
- 1.75 x 16 Double Top Girt Truss Carrier
- Beige Tuff Rib 3 Panel Steel Siding
- Forest Green Tuff Rib 3 Panel Steel Roof
- No Concrete Provided

• **DOORS & WINDOWS**


- Open Wall On Eave1

• **12" EAVE OVRHG., 0" GABLE OVRHG. W/ VENTED STEEL SOFFIT**

• **FASTENERS**

- 1 In.Metal to Wood Screws for Steel Wall, Roof Panels
- 4.5 Headlok Screws for Truss Carrier
- 16D Galv. Nails for Skirt Board
- Galvanized Steel Framing Nails

• **DETAILED BUILDING PLANS**

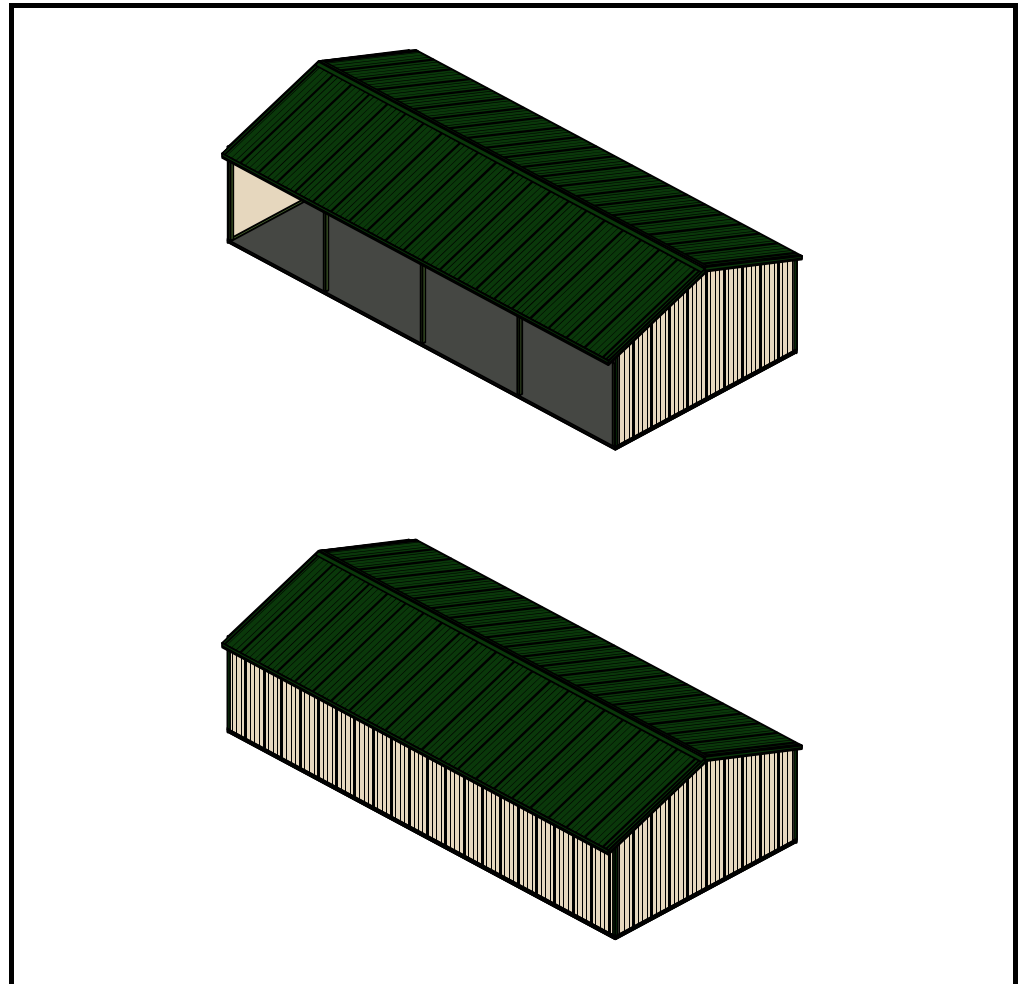

Subtotal	\$12,279.25
Discount	(\$1,719.00)
<b>Total</b>	<b>\$10,560.25</b>

ESTIMATE NUMBER: 19874



**POLE LAYOUT**  
Personal Use, 1920 sq. ft.



**Eave 1**

