



APM Buildings Quotation Package



QUOTATION FOR:
3 Sided 3Side406012

CONTACT:
1-888-261-2488

CONSTRUCTION: Post Frame
DIMENSIONS: 40' X 60' X 12'

SPECIFICATIONS FOR 40' X 60' X 12' POST FRAME PACKAGE:

• **MATERIAL PACKAGE**

- Pre-Engineered Wood Trusses (4/12 Pitch, 4' O/C)
- 4.125 x 5.25 GLU LAM TREATED 3 Ply Eave Posts (12' O/C)
- 4.125 x 5.25 GLU LAM TREATED 3 Ply Gable Posts (8' O/C)
- 2 x 8 Treated Skirt Boards (1 Row)
- 2 x 4 Wall Girts (24" O/C) and Roof Purlins (24" O/C)
- 1.75 x 14 Double Top Girt Truss Carrier
- Beige Tuff Rib 3 Panel Steel Siding
- Forest Green Tuff Rib 3 Panel Steel Roof
- No Concrete Provided

• **DOORS & WINDOWS**


- Open Wall On Eave1

• **12" EAVE OVRHG., 0" GABLE OVRHG. W/ VENTED STEEL SOFFIT**

• **FASTENERS**

- 1 In.Metal to Wood Screws for Steel Wall, Roof Panels
- 4.5 Headlok Screws for Truss Carrier
- 16D Galv. Nails for Skirt Board
- Galvanized Steel Framing Nails

• **DETAILED BUILDING PLANS**

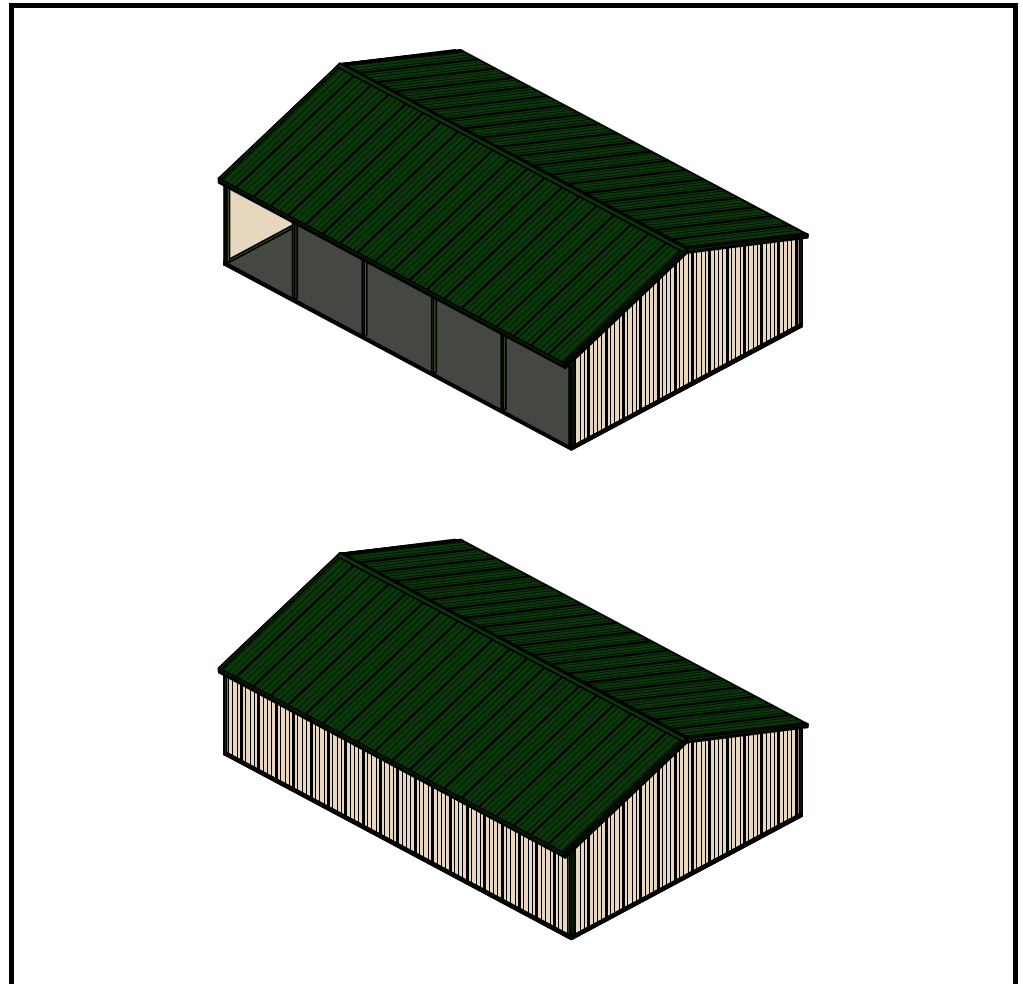

Subtotal	\$14,163.09
Discount	(\$1,982.00)
Total	\$12,181.09

ESTIMATE NUMBER: 19875



POLE LAYOUT
Personal Use, 2400 sq. ft.



Eave 1

