



# APM Buildings Quotation Package

**QUOTATION FOR:**

With Lean-To Lean305014

**CONTACT:**

1-888-261-2488

**CONSTRUCTION:**

Post Frame

**DIMENSIONS:**

30' X 50' X 14'

**EAVE1 PORCH**

12' X 50' X 10' 10 3/8"

**SPECIFICATIONS FOR 30' X 50' X 14' POST FRAME PACKAGE:****• MATERIAL PACKAGE**

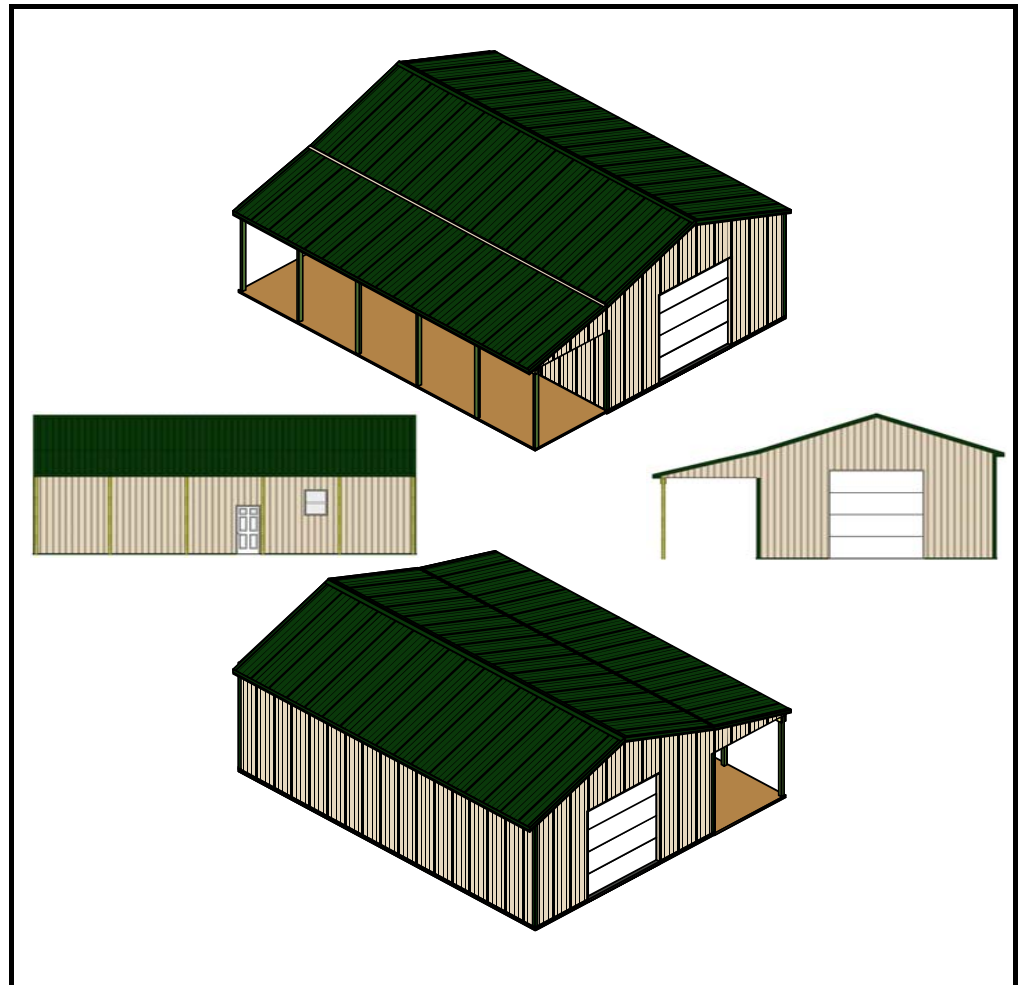
- Pre-Engineered Wood Trusses (4/12 Pitch, 4' O/C)
- 4.5 x 5.25 APM Stock Columns 3 Ply Eave Posts (8' O/C)
- 4.5 x 5.25 APM Stock Columns 3 Ply Gable Posts (8' O/C)
- 2 x 8 Treated Skirt Boards (1 Row)
- 2 x 4 Wall Girts (24" O/C) and Roof Purlins (24" O/C)
- 2 x 10 Double Top Girt Truss Carrier
- Beige Tuff Rib 3 Panel Steel Siding
- Forest Green Tuff Rib 3 Panel Steel Roof
- No Concrete Provided

**• DOORS & WINDOWS**

- Two 12 X 12 Clopay T52S Ins. Std. Trk. w/o Openers
- One 3' 6 Panel Entry Door
- One Stock Windows 3' x 3' 8" Single Hung Window

**• 12' X 10' 10 3/8" X 50' DUAL PITCH PORCH, EAVE 1****• 12" EAVE OVRHG., 0" GABLE OVRHG. W/ VENTED STEEL SOFFIT****• FASTENERS**

- 1 In.Metal to Wood Screws for Steel Wall, Roof Panels
- 4.5 Headlok Screws for Truss Carrier
- 16D Galv. Nails for Skirt Board
- Galvanized Steel Framing Nails

**• DETAILED BUILDING PLANS**

Subtotal	\$15,822.82
Discount	(\$2,215.00)
<b>Total</b>	<b>\$13,607.82</b>

**ESTIMATE NUMBER: 19897**

**Eave 1**

