



APM Buildings Quotation Package



QUOTATION FOR:

With Lean-To Lean406016

CONTACT:

1-888-261-2488

CONSTRUCTION:

Post Frame

DIMENSIONS:

40' X 60' X 16'

EAVE1 PORCH

12' X 60' X 12' 10 1/4"

SPECIFICATIONS FOR 40' X 60' X 16' POST FRAME PACKAGE:

● **MATERIAL PACKAGE**

- Pre-Engineered Wood Trusses (4/12 Pitch, 4' O/C)
- 4.5 x 7.25 APM Stock Columns 3 Ply Eave Posts (8' O/C)
- 4.5 x 7.25 APM Stock Columns 3 Ply Gable Posts (8' O/C)
- 2 x 8 Treated Skirt Boards (1 Row)
- 2 x 4 Wall Girts (24" O/C) and Roof Purlins (24" O/C)
- 2 x 12 Double Top Girt Truss Carrier
- Beige Tuff Rib 3 Panel Steel Siding
- Forest Green Tuff Rib 3 Panel Steel Roof
- No Concrete Provided

● **DOORS & WINDOWS**

- Two 14 X 14 Clopay T52S Ins. Std. Trk. w/o Openers
- One 3' 6 Panel Entry Door
- One Stock Windows 3' x 3' 8" Single Hung Window


● **12' X 12' 10 1/4" X 60' DUAL PITCH PORCH, EAVE 1**

● **12" EAVE OVRHG., 0" GABLE OVRHG. W/ VENTED STEEL SOFFIT**

● **FASTENERS**

- 1 In.Metal to Wood Screws for Steel Wall, Roof Panels
- 4.5 Headlok Screws for Truss Carrier
- 16D Galv. Nails for Skirt Board
- Galvanized Steel Framing Nails

● **DETAILED BUILDING PLANS**

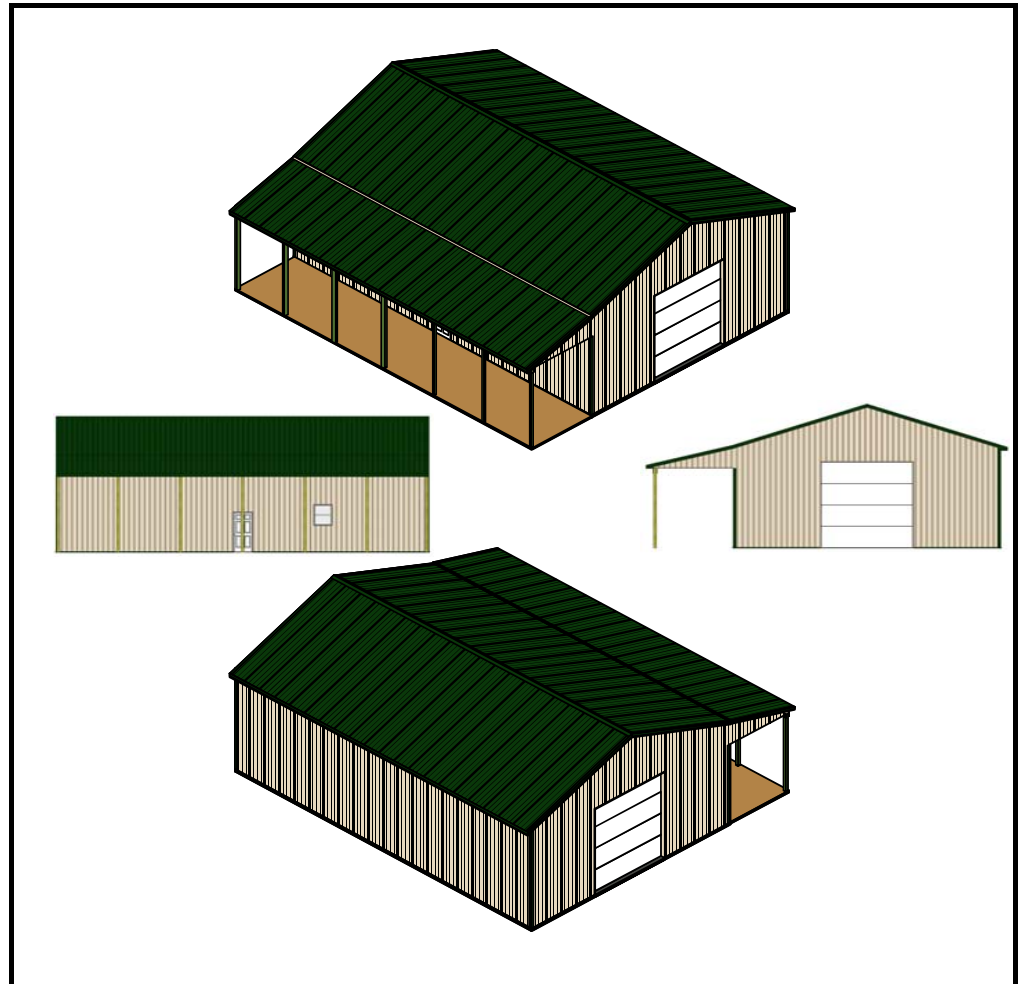

Subtotal	\$21,900.39
Discount	(\$3,066.00)
Total	\$18,834.39

ESTIMATE NUMBER: 19898

Eave 1

