



# APM Buildings Quotation Package



**QUOTATION FOR:**  
Wood Wood303210

**CONTACT:**  
1-888-261-2488

**CONSTRUCTION:** Post Frame  
**DIMENSIONS:** 30' X 32' X 10'

**SPECIFICATIONS FOR 30' X 32' X 10' POST FRAME PACKAGE:**

● **MATERIAL PACKAGE**

- Pre-Engineered Wood Trusses (4/12 Pitch, 4' O/C)
- 4.5 x 5.25 APM Stock Columns 3 Ply Eave Posts (8' O/C)
- 4.5 x 5.25 APM Stock Columns 3 Ply Gable Posts (10' O/C)
- 2 x 8 Treated Skirt Boards (1 Row)
- 2 x 4 Wall Girts (24" O/C) and Roof Purlins (24" O/C)
- 2 x 10 Double Top Girt Truss Carrier
- 7/8" Rough 1 side Pine Boards
- Forest Green Tuff Rib 3 Panel Steel Roof
- No Concrete Provided

● **DOORS & WINDOWS**


- Two 9 X 8 Clopay T52S Ins. Std. Trk. w/o Openers
- One 3' 6 Panel Entry Door
- One Stock Windows 3' x 3' 8" Single Hung Window

● **12" EAVE OVRHG., 0" GABLE OVRHG. W/ VENTED STEEL SOFFIT**

● **FASTENERS**

- 8D Galv. Nails for Plywood Siding
- 1 In.Metal to Wood Screws for Steel Roof Panel
- 4.5 Headlok Screws for Truss Carrier
- 16D Galv. Nails for Skirt Board
- Galvanized Steel Framing Nails

● **DETAILED BUILDING PLANS**

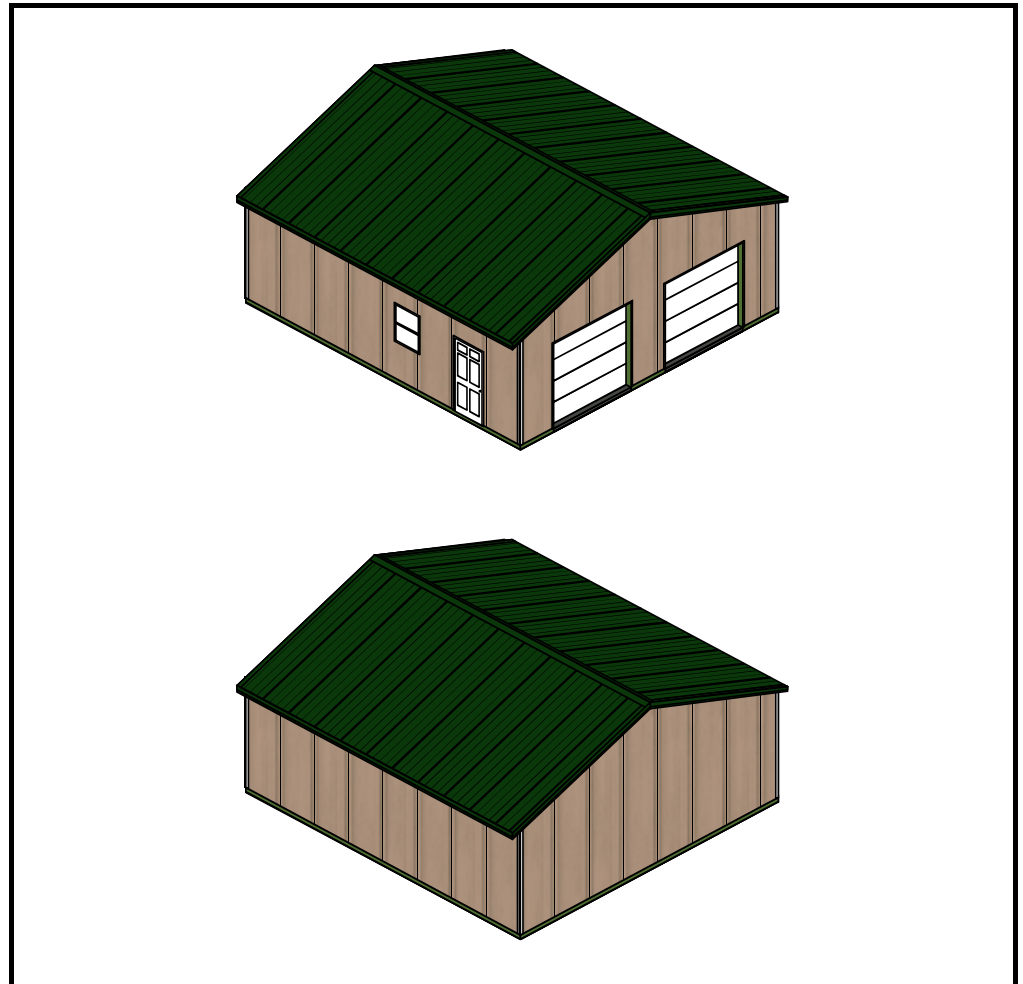

Subtotal	\$8,972.42
Discount	(\$448.00)
<b>Total</b>	<b>\$8,524.42</b>

**ESTIMATE NUMBER: 19870**



# POLE LAYOUT

Personal Use, 960 sq. ft.



## Eave 1

