



# APM Buildings Quotation Package



**QUOTATION FOR:**  
Wood Wood305012

**CONTACT:**  
1-888-261-2488

**CONSTRUCTION:** Post Frame  
**DIMENSIONS:** 30' X 50' X 12'

**SPECIFICATIONS FOR 30' X 50' X 12' POST FRAME PACKAGE:**

• **MATERIAL PACKAGE**

- Pre-Engineered Wood Trusses (4/12 Pitch, 4' O/C)
- 4.5 x 5.25 APM Stock Columns 3 Ply Eave Posts (8' O/C)
- 4.5 x 5.25 APM Stock Columns 3 Ply Gable Posts (10' O/C)
- 2 x 8 Treated Skirt Boards (1 Row)
- 2 x 4 Wall Girts (24" O/C) and Roof Purlins (24" O/C)
- 2 x 10 Double Top Girt Truss Carrier
- 7/8" Yellow Pine RBB Plywood Siding
- Forest Green Tuff Rib 3 Panel Steel Roof
- No Concrete Provided

• **DOORS & WINDOWS**


- Two 10 X 10 Clopay T52S Ins. Std. Trk. w/o Openers
- One 3' 6 Panel Entry Door
- One Stock Windows 3' x 3' 8" Single Hung Window

• **12" EAVE OVRHG., 0" GABLE OVRHG. W/ VENTED STEEL SOFFIT**

• **FASTENERS**

- 8D Galv. Nails for Plywood Siding
- 1 In.Metal to Wood Screws for Steel Roof Panel
- 4.5 Headlok Screws for Truss Carrier
- 16D Galv. Nails for Skirt Board
- Galvanized Steel Framing Nails

• **DETAILED BUILDING PLANS**

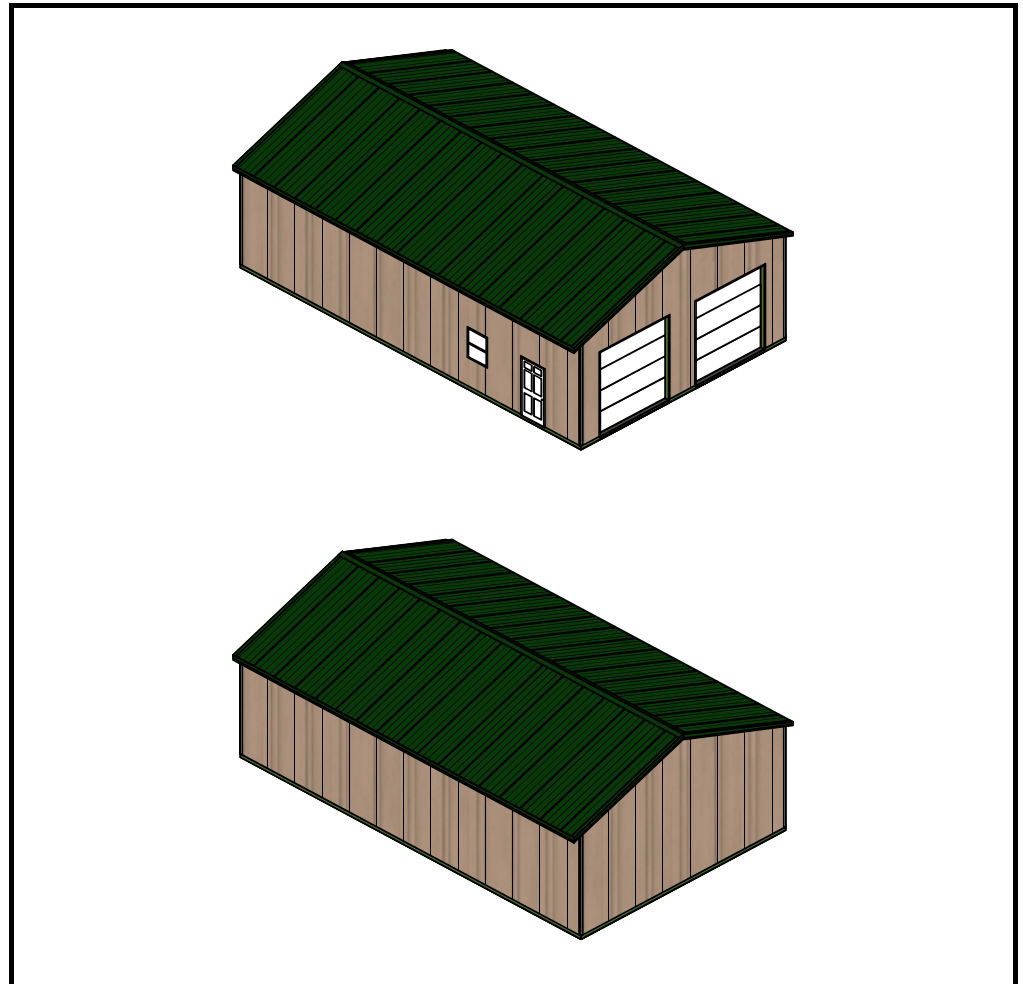

|              |                    |
|--------------|--------------------|
| Subtotal     | \$13,151.17        |
| Discount     | (\$657.00)         |
| <b>Total</b> | <b>\$12,494.17</b> |

**ESTIMATE NUMBER: 19871**



**POLE LAYOUT**  
Personal Use, 1500 sq. ft.



**Eave 1**

